
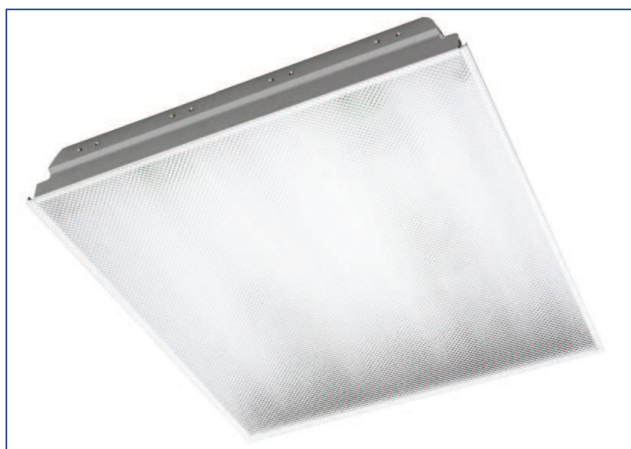


MARENCO

T5 & T8 Recessed Luminaire with Prismatic Diffuser

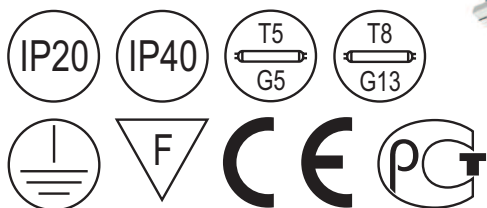

Marengo 418 F47

Type: Traditional recessed luminaire with prismatic diffuser for most applications. Premium quality at competitive prices.

Specification: UV stable prismatic diffuser. Marengo 418 F47 with framed prismatic glass.
Fully enclosed white steel body.
Luminaire is plastic-wrapped and packaged in twin boxes.

Installation: Fits 15–24 mm exposed T-Bar ceilings 600×600 mm

Application: Office buildings, shops and other commercial environments.

Type	Description	Lamp (W) and holder	Overall dimensions, mm	Weight, kg	Total wattage, W
Marengo 218 I33	IP20	2×18 (G13)	295×595×85	2,4	42
Marengo 318 L60	IP20	3×18 (G13)	595×595×72	3,7	63
Marengo 318 L61	IP40, framed	3×18 (G13)	595×595×72	3,7	63
Marengo 418 D09	IP20	4×18 (G13)	595×595×72	3,7	84
Marengo 418 F47	IP40, framed	4×18 (G13)	595×595×72	3,7	84
Marengo 236 K25	IP20	2×36 (G13)	295×1195×85	3,9	84
Marengo 336 L62	IP20	3×36 (G13)	595×1195×85	7,2	126
Marengo 436 K26	IP20	4×36 (G13)	595×1195×85	7,2	168

Type	Description	Lamp (W) and holder	Overall dimensions, mm	Weight, kg	Total wattage, W
Marenco 214 I36	IP20	2×14 (G5)	295×595×85	2,2	31
Marenco 224 I37	IP20	2×24 (G5)	295×595×85	2,2	49
Marenco 314 L63	IP20	3×14 (G5)	595×595×72	2,9	47
Marenco 324 L64	IP20	3×24 (G5)	595×595×72	2,9	74
Marenco 314 L65	IP40, framed	3×14 (G5)	595×595×72	2,9	47
Marenco 324 L66	IP40, framed	3×24 (G5)	595×595×72	2,9	74
Marenco 414 I38	IP20	4×14 (G5)	595×595×72	2,9	62
Marenco 424 I39	IP20	4×24 (G5)	595×595×72	2,9	98
Marenco 414 I40	IP40, framed	4×14 (G5)	595×595×72	2,9	62
Marenco 424 I41	IP40, framed	4×24 (G5)	595×595×72	2,9	98
Marenco 228 J59	IP20	2×28 (G5)	295×1195×85	3,2	60
Marenco 254 J60	IP20	2×54 (G5)	295×1195×85	3,2	115
Marenco 328 L67	IP20	3×28 (G5)	595×1195×85	5,7	90,5
Marenco 354 L68	IP20	3×54 (G5)	595×1195×85	5,7	173
Marenco 428 J61	IP20	4×28 (G5)	595×1195×85	5,7	120
Marenco 454 J62	IP20	4×54 (G5)	595×1195×85	5,7	230

Options available on request:

- HF – High Frequency control gear
- DIM – Dimmable ballast 1-10V
- SWITCHDIM – Switch DIM ballast
- DALI – DALI ballast
- EMG – Emergency version 1 hour
- EM2 – Emergency version 2 hours
- EM3 – Emergency version 3 hours
- 4TB – 4 way terminal block for loop feed and ease of wiring
- 5TB – 5 way terminal block for loop feed and ease of wiring
- WIE – 3-poles connector (subject to minimum order)
- NCP – Low Power Factor

MARENCO 418 F47 HF

