


# BOOTES LED

**Decorative Surface  
LED Luminaire with  
Opal Diffuser**



**BOOTES LED1X1100 E757 T840 OP  
LT80**

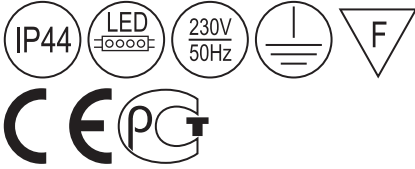

**BOOTES LED1X4100 D383 T840 OP  
LT80**



**BOOTES LED1X9600 E766 T840 OP  
LT80**



**BOOTES LED1X4100 D380 T840 OP  
LT80**

**Type:** A decorative surface mounted LED luminaire with a modern shape body and opal diffuser.

**Specification:** UV stable opal diffuser is fitted to the body with an enclosed steel frame.  
Light grey powder painted steel body and frame.  
Luminaire is plastic-wrapped and boxed individually.

**Installation:** Surface luminaire designed to be fixed to ceiling of any type.

**Application:** Office buildings, shops and other commercial environments.

Name	Overall dimensions (LxWxH), mm	Lifetime	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Bootes LED1x800 E756 T840 OP LT80	382x382x75	50000	779	9	80+	4000	1,90
Bootes LED1x1100 E757 T840 OP LT80	382x382x75	50000	1063	12	80+	4000	1,90
Bootes LED1x1500 E758 T840 OP LT80	382x382x75	50000	1441	17	80+	4000	1,90

Name	Overall dimensions (LxWxH), mm	Lifetime	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Bootes LED1x3600 D379 T840 OP LT80	1132x382x75	50000	3508	33	80+	4000	4,40
Bootes LED1x4100 D380 T840 OP LT80	1132x382x75	50000	4052	40	80+	4000	4,40
Bootes LED1x5600 D381 T840 OP LT80	1132x382x75	50000	5594	60	80+	4000	4,40
Bootes LED1x3600 D382 T840 OP LT80	632x632x75	50000	3508	33	80+	4000	4,50
Bootes LED1x4100 D383 T840 OP LT80	632x632x75	50000	4052	40	80+	4000	4,50
Bootes LED1x5600 D384 T840 OP LT80	632x632x75	50000	5594	60	80+	4000	4,50
Bootes LED1x7100 E765 T840 OP LT80	882x882x75	50000	7011	70	80+	4000	5,50
Bootes LED1x9600 E766 T840 OP LT80	882x882x75	50000	9563	102	80+	4000	5,70
Bootes LED1x13000 E767 T840 OP LT80	882x882x75	50000	12972	147	80+	4000	5,70

\* Tolerance range for optical and electrical data:  $\pm 10\%$

#### Options available on request:

- DALI – DALI driver
- SDIM – Switch-control/dimming
- EMG – Emergency version 1 hour
- EM3 – Emergency version 3 hours
- OP LT80 – Opal diffuser with 80% light transmission
- RAL – RAL colours
- T830 – Colour temperature 3000K
- T840 – Colour temperature 4000K

#### BOOTES LED1X4100 D383 T840 OP LT80

