


LODOS S LED

Decorative LED Luminaire



- Type:** A decorative and modern LED luminaire in four sizes to fit wide range of applications.
- Specification:** Opal acrylic diffuser.
White powder coated body and gear tray with quick lock system.
Luminaire is boxed individually.
- Installation:** Surface luminaire is designed to be fixed to ceiling of any type or suspended. Wire suspension set is ordered separately.
- Application:** Indoor. Office buildings, shops and other commercial environments.

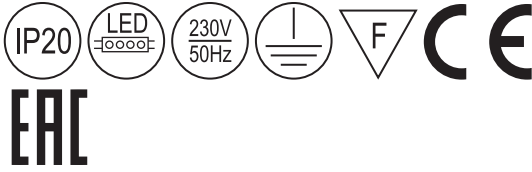

Wire suspension set (Lodos S suspension KIT) is available on request.

Name	Overall dimensions (LxWxH), mm	Life-time	Luminaire output*, lm Ta=25°C	System power*, W	CRI (Ra)	CCT, K	Weight, kg
Lodos S LED1x1800 D361 T840 OP LT80	Ø300x125	50000	1798	19	80+	4000	2,50
Lodos S LED1x2600 D362 T840 OP LT80	Ø300x125	50000	2526	27	80+	4000	2,50
Lodos S LED1x3300 D363 T840 OP LT80	Ø450x125	50000	3251	31	80+	4000	4,80
Lodos S LED1x4500 D364 T840 OP LT80	Ø450x125	50000	4493	44	80+	4000	4,80
Lodos S LED1x5900 D365 T840 OP LT80	Ø600x135	50000	5849	55	80+	4000	7,50
Lodos S LED1x7000 D366 T840 OP LT80	Ø600x135	50000	6985	67	80+	4000	7,50
Lodos S LED1x8400 D367 T840 OP LT80	Ø900x150	50000	8332	80	80+	4000	10,50
Lodos S LED1x10200 D368 T840 OP LT80	Ø900x150	50000	10116	100	80+	4000	10,50

* Tolerance range for optical and electrical data: ±10 %

Options available on request:

- SDIM – Switch-control/dimming
- DALI – DALI driver
- TW – Tunable white
- BLT – Bluetooth unit (for wireless control via mobile device)
- EMG – Emergency version 1 hour
- EM3 – Emergency version 3 hours
- OP LT80 – Opal diffuser with 80% light transmission
- 5TB – 5 way terminal block with two holes (for in and out going cable)
- RAL – RAL colours
- SUS – Suspended version
- T830 – Colour temperature 3000K
- T840 – Colour temperature 4000K

LODOS S LED1X5900 D365 T840 OP

