


JETTA

Recessed Luminaire with Central Louver

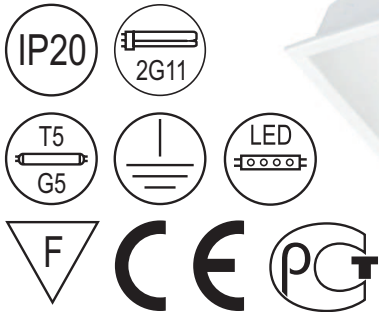

Type: Recessed LED, T5 or CFL luminaire with direct/indirect lighting possibilities.

Specification: A white perforated diffuser with UV stable opal film to give soft light distribution and mirror louver for direct lighting applications. Two parabolic reflectors.
Fully enclosed white steel body.
Luminaire is plastic-wrapped and packaged in twin boxes.

Installation: Fits 15-24mm exposed T-Bar ceilings 600x600mm.

Application: Office buildings, shops and other commercial environments.

Type	Lamp (W) and holder	Overall dimensions, mm	Weight, kg	Total wattage, W
Jetta 414 D62	4x14 (G5)	595x595x100	5,1	62
Jetta 424 G45	4x24 (G5)	595x595x100	5,2	98
Jetta 255 O26	2x55 (2G11)	595x595x100	4	118
Jetta 214214 G46*	2x14(G5)+2x14(G5)	595x595x100	5,3	62
Jetta 214224 G47*	2x14(G5)+2x24(G5)	595x595x100	5,3	80
Jetta 224224 G48*	2x24(G5)+2x24(G5)	595x595x100	5,3	98
Jetta 214240 G49*	2x14(G5)+2x40(2G11)	595x595x100	5,3	118
Jetta 224240 G50*	2x24(G5)+2x40(2G11)	595x595x100	5,3	136
Jetta 214255 G51*	2x14(G5)+2x55(2G11)	595x595x100	5,3	144
Jetta 314 H54	3x14 (G5)	595x595x100	5,1	46
Jetta 324 H91	3x24 (G5)	595x595x100	5,2	73
Jetta 114214 H55*	1x14(G5)+2x14(G5)	595x595x100	5,3	46
Jetta 114224 H56*	1x14(G5)+2x24(G5)	595x595x100	5,3	61
Jetta 124224 H57*	1x24(G5)+2x24(G5)	595x595x100	5,3	74
Jetta 114240 H58*	1x14(G5)+2x40(2G11)	595x595x100	5,3	102
Jetta 124240 H59*	1x24(G5)+2x40(2G11)	595x595x100	5,3	112
Jetta 114255 H60*	1x14(G5)+2x55(2G11)	595x595x100	5,3	129

* – lighting fixture supplied with two electronic ballasts and terminal boards to play three different scenes (direct light, indirect light or both direct and indirect light). The two-phase switcher is needed.

Type	Overall dimensions, mm	Luminous flux, lm	Color temperature, K	Color rendering, Ra	Total wattage, W	Weight, kg
Jetta R LED4x1050 B342 T840	595x595x100	4200	4000	>80	31	4
Jetta R LED4x1400 B343 T840	595x595x100	5600	4000	>80	46	4
Jetta R LED4x2000 B344 T840	595x595x100	8000	4000	>80	66	4

Options available on request:

- DIM – Dimmable ballast 1-10V
- SWITCHDIM – Switch DIM ballast
- DALI – DALI ballasts
- EMG – Emergency version 1 hour
- EM2 – Emergency version 2 hours
- EM3 – Emergency version 3 hours
- WIE – 3- poles connector Wieland or similar connectors (subject to minimum order)
- T830 – Color temperature 3000K
- T840 – Color temperature 4000K
- T857 – Color temperature 5700K

JETTA 414 D62

