


SHOP

T5 Batten Luminaire for in-line connection

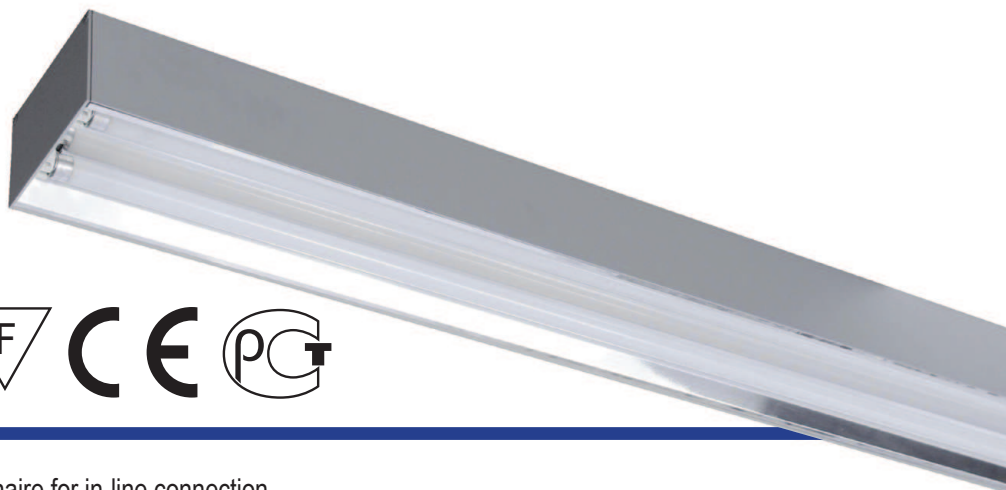

Type: T5 batten luminaire for in-line connection.

Specification: Specular aluminum reflector.
Body made of extruded aluminum profile powder painted in textured RAL 9006. Aluminum end caps fixed by two screws. Luminaire with an option "L" for in-line connection.
Luminaire is plastic-wrapped and boxed individually.

Installation: Surface luminaire designed to be fixed to ceilings of any type or suspended. Wire suspension set available on request (see option list).

Application: Warehouses, factories, supermarkets, other commercial environments.

Type	Lamp (W) and holder	Overall dimensions, mm	Weight, kg	Total wattage, W
Shop 114 N43	1x14 (G5)	110x576x70	1,40	15
Shop 124 N44	1x24 (G5)	110x576x70	1,40	25
Shop 128 N45	1x28 (G5)	110x1176x70	2,15	30
Shop 154 N48	1x54 (G5)	110x1176x70	2,15	58
Shop 135 N46	1x35 (G5)	110x1476x70	2,65	38
Shop 149 N47	1x49 (G5)	110x1476x70	2,65	53
Shop 180 N49	1x80 (G5)	110x1476x70	2,75	85
Shop 2x114 N50	2x1x14 (G5)	110x1151x70	2,80	30
Shop 2x124 N51	2x1x24 (G5)	110x1151x70	2,80	50
Shop 2x128 N52	2x1x28 (G5)	110x2351x70	4,3	60
Shop 2x154 N55	2x1x54 (G5)	110x2351x70	4,3	116
Shop 2x135 N53	2x1x35 (G5)	110x2951x70	5,3	76
Shop 2x149 N54	2x1x49 (G5)	110x2951x70	5,3	106
Shop 2x180 N56	2x1x80 (G5)	110x2951x70	5,5	170
Shop 214 N29	2x14 (G5)	110x576x70	1,40	31
Shop 224 N30	2x24 (G5)	110x576x70	1,40	49
Shop 228 N31	2x28 (G5)	110x1176x70	2,15	60
Shop 254 N34	2x54 (G5)	110x1176x70	2,15	116
Shop 235 N32	2x35 (G5)	110x1476x70	2,65	76
Shop 249 N33	2x49 (G5)	110x1476x70	2,65	105
Shop 280 N35	2x80 (G5)	110x1476x70	2,75	170
Shop 2x214 N36	2x2x14 (G5)	110x1151x70	2,80	62
Shop 2x224 N37	2x2x24 (G5)	110x1151x70	2,80	98
Shop 2x228 N38	2x2x28 (G5)	110x2351x70	4,3	120
Shop 2x254 N41	2x2x54 (G5)	110x2351x70	4,3	232
Shop 2x235 N39	2x2x35 (G5)	110x2951x70	5,3	152
Shop 2x249 N40	2x2x49 (G5)	110x2951x70	5,3	210
Shop 2x280 N42	2x2x80 (G5)	110x2951x70	5,5	340

3 in one (4426 mm) and 4 in one (5901 mm) versions are available on request



S-JOIN3 or S-JOIN6- Versions with 3 or 6 poles male/female type connectors are available on request. See Option list

Options available on request:

- | | | | |
|-----------|--|---------|---|
| DIM | - Dimmable ballast 1-10V | PAR | - Double parabolic reflector |
| SWITCHDIM | - Switch DIM ballast | MRO | - MIRO® reflector Deluxe (subject to minimum order) |
| DALI | - DALI ballast | L | - Designed for in-line connecting without gap |
| EMG | - Emergency version 1 hour | S-JOIN3 | - Version with 3 poles quick connector |
| EM2 | - Emergency version 2 hours | S-JOIN6 | - Version with 6 poles quick connector |
| EM3 | - Emergency version 3 hours | 1LIN | - Through wiring 3x1.5 mm ² with two push-in terminals |
| 4TB | - 4 way terminal block for loop feed and ease of wiring | 3LIN | - Through wiring 5x1.5 mm ² with two push-in terminals |
| 5TB | - 5 way terminal block with two holes (for in and out going cable) | 1LIN2,5 | - Through wiring 3x2.5 mm ² with two push-in terminals |
| MAT | - Matt reflector (subject to minimum order) | 3LIN2,5 | - Through wiring 5x2.5 mm ² with two push-in terminals |
| | | RAL | - Painted RAL colour |

SHOP 249 N33

