



# LEVANTO & MARENCO LED

Recessed Luminaire with Opal or Prismatic Diffuser



**Marengo R LED4x1050 B202 T840**

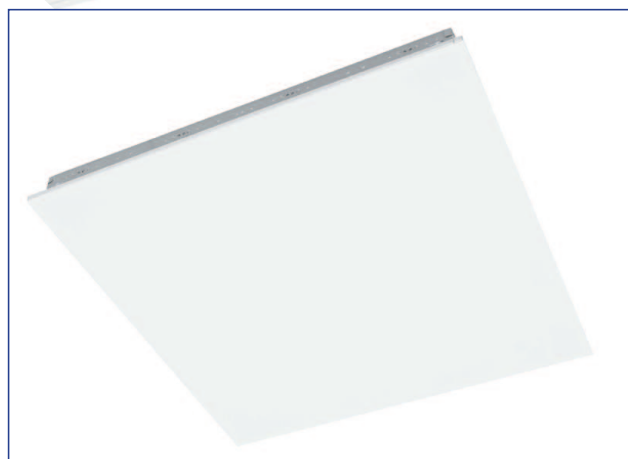

**Levanto R LED4x1050 B199 T840**

**Type:** Traditional recessed LED luminaire with opal or prismatic diffuser for most applications. Premium quality at competitive prices.

**Specification:** UV stable opal (Levanto) or prismatic (Marengo) diffuser.  
Fully enclosed white steel body.  
Luminare is plastic-wrapped and packaged in twin boxes.

**Installation:** Fits 15-24mm exposed T-Bar and/or plasterboard ceilings (only framed version). When the luminaire is fitted into a plasterboard ceiling, it is recommended to use support brackets.

**Application:** Office buildings, shops and other commercial environments.



Fitting can be made with "Wieland" type socket for quick connection. "Push in" type connector for 2 cables 3x2,5mm<sup>2</sup> supplied with a fitting. So total installation time can be reduced to a few minutes. More information see in sophisticated solutions

| Type                          | Description | Overall dimensions, mm | Luminous flux, lm | Color temperature, K | Color rendering, Ra | Total wattage, W | Weight, kg |
|-------------------------------|-------------|------------------------|-------------------|----------------------|---------------------|------------------|------------|
| Levanto R LED1x1050 B251 T840 | IP20        | 295x595x57             | 1050              | 4000                 | >80                 | 8                | 1,2        |
| Levanto R LED1x1400 B252 T840 | IP20        | 295x595x57             | 1400              | 4000                 | >80                 | 12               | 1,2        |
| Levanto R LED1x2000 B253 T840 | IP20        | 295x595x57             | 2000              | 4000                 | >80                 | 17               | 1,2        |
| Levanto R LED2x1050 B209 T840 | IP20        | 295x595x57             | 2100              | 4000                 | >80                 | 16               | 1,2        |
| Levanto R LED2x1400 B254 T840 | IP20        | 295x595x57             | 2800              | 4000                 | >80                 | 23               | 1,2        |
| Levanto R LED2x2000 B255 T840 | IP20        | 295x595x57             | 4000              | 4000                 | >80                 | 33               | 1,2        |
| Levanto R LED3x1050 B198 T840 | IP20        | 595x595x57             | 3150              | 4000                 | >80                 | 24               | 2          |
| Levanto R LED3x1400 B256 T840 | IP20        | 595x595x57             | 4200              | 4000                 | >80                 | 35               | 2          |
| Levanto R LED3x2000 B257 T840 | IP20        | 595x595x57             | 6000              | 4000                 | >80                 | 50               | 2          |
| Levanto R LED4x1050 B199 T840 | IP20        | 595x595x57             | 4200              | 4000                 | >80                 | 31               | 2          |
| Levanto R LED4x1400 B258 T840 | IP20        | 595x595x57             | 5600              | 4000                 | >80                 | 46               | 2          |
| Levanto R LED4x2000 B259 T840 | IP20        | 595x595x57             | 8000              | 4000                 | >80                 | 66               | 2          |
| Levanto R LED1x2350 B260 T840 | IP20        | 143x1195x57            | 2350              | 4000                 | >80                 | 17               | 1,6        |
| Levanto R LED1x3150 B261 T840 | IP20        | 143x1195x57            | 3150              | 4000                 | >80                 | 25               | 1,6        |
| Levanto R LED1x4300 B262 T840 | IP20        | 143x1195x57            | 4300              | 4000                 | >80                 | 36               | 1,6        |
| Levanto R LED2x2350 B210 T840 | IP20        | 295x1195x57            | 4700              | 4000                 | >80                 | 34               | 2,6        |
| Levanto R LED2x3150 B263 T840 | IP20        | 295x1195x57            | 6300              | 4000                 | >80                 | 49               | 2,6        |
| Levanto R LED2x4300 B264 T840 | IP20        | 295x1195x57            | 8600              | 4000                 | >80                 | 71               | 2,6        |
| Levanto R LED3x2350 B211 T840 | IP20        | 595x1195x57            | 7050              | 4000                 | >80                 | 50               | 5          |
| Levanto R LED3x3150 B265 T840 | IP20        | 595x1195x57            | 9450              | 4000                 | >80                 | 74               | 5          |
| Levanto R LED3x4300 B266 T840 | IP20        | 595x1195x57            | 12900             | 4000                 | >80                 | 107              | 5          |
| Levanto R LED4x2350 B212 T840 | IP20        | 595x1195x57            | 9400              | 4000                 | >80                 | 67               | 5          |
| Levanto R LED4x3150 B267 T840 | IP20        | 595x1195x57            | 12600             | 4000                 | >80                 | 98               | 5          |
| Levanto R LED4x4300 B268 T840 | IP20        | 595x1195x57            | 17200             | 4000                 | >80                 | 142              | 5          |
| Marengo R LED1x1050 B269 T840 | IP20        | 295x595x57             | 1050              | 4000                 | >80                 | 8                | 1,2        |
| Marengo R LED1x1400 B270 T840 | IP20        | 295x595x57             | 1400              | 4000                 | >80                 | 12               | 1,2        |
| Marengo R LED1x2000 B271 T840 | IP20        | 295x595x57             | 2000              | 4000                 | >80                 | 17               | 1,2        |
| Marengo R LED2x1050 B213 T840 | IP20        | 295x595x57             | 2100              | 4000                 | >80                 | 16               | 1,2        |
| Marengo R LED2x1400 B272 T840 | IP20        | 295x595x57             | 2800              | 4000                 | >80                 | 23               | 1,2        |
| Marengo R LED2x2000 B273 T840 | IP20        | 295x595x57             | 4000              | 4000                 | >80                 | 33               | 1,2        |
| Marengo R LED3x1050 B201 T840 | IP20        | 595x595x57             | 3150              | 4000                 | >80                 | 24               | 2          |
| Marengo R LED3x1400 B274 T840 | IP20        | 595x595x57             | 4200              | 4000                 | >80                 | 35               | 2          |
| Marengo R LED3x2000 B275 T840 | IP20        | 595x595x57             | 6000              | 4000                 | >80                 | 50               | 2          |
| Marengo R LED4x1050 B202 T840 | IP20        | 595x595x57             | 4200              | 4000                 | >80                 | 31               | 2          |
| Marengo R LED4x1400 B276 T840 | IP20        | 595x595x57             | 5600              | 4000                 | >80                 | 46               | 2          |
| Marengo R LED4x2000 B277 T840 | IP20        | 595x595x57             | 8000              | 4000                 | >80                 | 66               | 2          |
| Marengo R LED1x2350 B278 T840 | IP20        | 143x1195x57            | 2350              | 4000                 | >80                 | 17               | 1,6        |
| Marengo R LED1x3150 B279 T840 | IP20        | 143x1195x57            | 3150              | 4000                 | >80                 | 25               | 1,6        |
| Marengo R LED1x4300 B280 T840 | IP20        | 143x1195x57            | 4300              | 4000                 | >80                 | 36               | 1,6        |
| Marengo R LED2x2350 B214 T840 | IP20        | 295x1195x57            | 4700              | 4000                 | >80                 | 34               | 2,6        |
| Marengo R LED2x3150 B281 T840 | IP20        | 295x1195x57            | 6300              | 4000                 | >80                 | 49               | 2,6        |
| Marengo R LED2x4300 B282 T840 | IP20        | 295x1195x57            | 8600              | 4000                 | >80                 | 71               | 2,6        |
| Marengo R LED3x2350 B287 T840 | IP20        | 595x1195x57            | 7050              | 4000                 | >80                 | 50               | 5          |
| Marengo R LED3x3150 B283 T840 | IP20        | 595x1195x57            | 9450              | 4000                 | >80                 | 74               | 5          |
| Marengo R LED3x4300 B284 T840 | IP20        | 595x1195x57            | 12900             | 4000                 | >80                 | 107              | 5          |
| Marengo R LED4x2350 B215 T840 | IP20        | 595x1195x57            | 9400              | 4000                 | >80                 | 67               | 5          |
| Marengo R LED4x3150 B285 T840 | IP20        | 595x1195x57            | 12600             | 4000                 | >80                 | 98               | 5          |
| Marengo R LED4x4300 B286 T840 | IP20        | 595x1195x57            | 17200             | 4000                 | >80                 | 142              | 5          |



UV stable opal or prismatic sheet can be fitted to the body with a steel frame.


| Type                          | Description  | Overall dimensions, mm | Luminous flux, lm | Color temperature, K | Color rendering, Ra | Total wattage, W | Weight, kg |
|-------------------------------|--------------|------------------------|-------------------|----------------------|---------------------|------------------|------------|
| Levanto R LED1x1050 B288 T840 | IP40, framed | 295x595x57             | 1050              | 4000                 | >80                 | 8                | 1,4        |
| Levanto R LED1x1400 B289 T840 | IP40, framed | 295x595x57             | 1400              | 4000                 | >80                 | 12               | 1,4        |
| Levanto R LED1x2000 B290 T840 | IP40, framed | 295x595x57             | 2000              | 4000                 | >80                 | 17               | 1,4        |
| Levanto R LED2x1050 B291 T840 | IP40, framed | 295x595x57             | 2100              | 4000                 | >80                 | 16               | 1,4        |
| Levanto R LED2x1400 B292 T840 | IP40, framed | 295x595x57             | 2800              | 4000                 | >80                 | 23               | 1,4        |
| Levanto R LED2x2000 B293 T840 | IP40, framed | 295x595x57             | 4000              | 4000                 | >80                 | 33               | 1,4        |
| Levanto R LED3x1050 B294 T840 | IP40, framed | 595x595x57             | 3150              | 4000                 | >80                 | 24               | 2,2        |
| Levanto R LED3x1400 B295 T840 | IP40, framed | 595x595x57             | 4200              | 4000                 | >80                 | 35               | 2,2        |
| Levanto R LED3x2000 B296 T840 | IP40, framed | 595x595x57             | 6000              | 4000                 | >80                 | 50               | 2,2        |
| Levanto R LED4x1050 B334 T840 | IP40, framed | 595x595x57             | 4200              | 4000                 | >80                 | 31               | 2,2        |
| Levanto R LED4x1400 B335 T840 | IP40, framed | 595x595x57             | 5600              | 4000                 | >80                 | 46               | 2,2        |
| Levanto R LED4x2000 B297 T840 | IP40, framed | 595x595x57             | 8000              | 4000                 | >80                 | 66               | 2,2        |
| Levanto R LED1x2350 B298 T840 | IP40, framed | 143x1195x57            | 2350              | 4000                 | >80                 | 17               | 1,8        |
| Levanto R LED1x3150 B299 T840 | IP40, framed | 143x1195x57            | 3150              | 4000                 | >80                 | 25               | 1,8        |
| Levanto R LED1x4300 B300 T840 | IP40, framed | 143x1195x57            | 4300              | 4000                 | >80                 | 36               | 1,8        |
| Levanto R LED2x2350 B301 T840 | IP40, framed | 295x1195x57            | 4700              | 4000                 | >80                 | 34               | 2,8        |
| Levanto R LED2x3150 B302 T840 | IP40, framed | 295x1195x57            | 6300              | 4000                 | >80                 | 49               | 2,8        |
| Levanto R LED2x4300 B303 T840 | IP40, framed | 295x1195x57            | 8600              | 4000                 | >80                 | 71               | 2,8        |
| Levanto R LED3x2350 B304 T840 | IP40, framed | 595x1195x57            | 7050              | 4000                 | >80                 | 50               | 5,2        |
| Levanto R LED3x3150 B305 T840 | IP40, framed | 595x1195x57            | 9450              | 4000                 | >80                 | 74               | 5,2        |
| Levanto R LED3x4300 B306 T840 | IP40, framed | 595x1195x57            | 12900             | 4000                 | >80                 | 107              | 5,2        |
| Levanto R LED4x2350 B307 T840 | IP40, framed | 595x1195x57            | 9400              | 4000                 | >80                 | 67               | 5,2        |
| Levanto R LED4x3150 B308 T840 | IP40, framed | 595x1195x57            | 12600             | 4000                 | >80                 | 98               | 5,2        |
| Levanto R LED4x4300 B309 T840 | IP40, framed | 595x1195x57            | 17200             | 4000                 | >80                 | 142              | 5,2        |

| Type                          | Description  | Overall dimensions, mm | Luminous flux, lm | Color temperature, K | Color rendering, Ra | Total wattage, W | Weight, kg |
|-------------------------------|--------------|------------------------|-------------------|----------------------|---------------------|------------------|------------|
| Marengo R LED1x1050 B310 T840 | IP40, framed | 295x595x57             | 1050              | 4000                 | >80                 | 8                | 1,4        |
| Marengo R LED1x1400 B311 T840 | IP40, framed | 295x595x57             | 1400              | 4000                 | >80                 | 12               | 1,4        |
| Marengo R LED1x2000 B312 T840 | IP40, framed | 295x595x57             | 2000              | 4000                 | >80                 | 17               | 1,4        |
| Marengo R LED2x1050 B313 T840 | IP40, framed | 295x595x57             | 2100              | 4000                 | >80                 | 16               | 1,4        |
| Marengo R LED2x1400 B314 T840 | IP40, framed | 295x595x57             | 2800              | 4000                 | >80                 | 23               | 1,4        |
| Marengo R LED2x2000 B315 T840 | IP40, framed | 295x595x57             | 4000              | 4000                 | >80                 | 33               | 1,4        |
| Marengo R LED3x1050 B316 T840 | IP40, framed | 595x595x57             | 3150              | 4000                 | >80                 | 24               | 2,2        |
| Marengo R LED3x1400 B317 T840 | IP40, framed | 595x595x57             | 4200              | 4000                 | >80                 | 35               | 2,2        |
| Marengo R LED3x2000 B318 T840 | IP40, framed | 595x595x57             | 6000              | 4000                 | >80                 | 50               | 2,2        |
| Marengo R LED4x1050 B319 T840 | IP40, framed | 595x595x57             | 4200              | 4000                 | >80                 | 31               | 2,2        |
| Marengo R LED4x1400 B320 T840 | IP40, framed | 595x595x57             | 5600              | 4000                 | >80                 | 46               | 2,2        |
| Marengo R LED4x2000 B321 T840 | IP40, framed | 595x595x57             | 8000              | 4000                 | >80                 | 66               | 2,2        |
| Marengo R LED1x2350 B322 T840 | IP40, framed | 143x1195x57            | 2350              | 4000                 | >80                 | 17               | 1,8        |
| Marengo R LED1x3150 B323 T840 | IP40, framed | 143x1195x57            | 3150              | 4000                 | >80                 | 25               | 1,8        |
| Marengo R LED1x4300 B324 T840 | IP40, framed | 143x1195x57            | 4300              | 4000                 | >80                 | 36               | 1,8        |
| Marengo R LED2x2350 B325 T840 | IP40, framed | 295x1195x57            | 4700              | 4000                 | >80                 | 34               | 2,8        |
| Marengo R LED2x3150 B326 T840 | IP40, framed | 295x1195x57            | 6300              | 4000                 | >80                 | 49               | 2,8        |
| Marengo R LED2x4300 B327 T840 | IP40, framed | 295x1195x57            | 8600              | 4000                 | >80                 | 71               | 2,8        |
| Marengo R LED3x2350 B328 T840 | IP40, framed | 595x1195x57            | 7050              | 4000                 | >80                 | 50               | 5,2        |
| Marengo R LED3x3150 B329 T840 | IP40, framed | 595x1195x57            | 9450              | 4000                 | >80                 | 74               | 5,2        |
| Marengo R LED3x4300 B330 T840 | IP40, framed | 595x1195x57            | 12900             | 4000                 | >80                 | 107              | 5,2        |
| Marengo R LED4x2350 B331 T840 | IP40, framed | 595x1195x57            | 9400              | 4000                 | >80                 | 67               | 5,2        |
| Marengo R LED4x3150 B332 T840 | IP40, framed | 595x1195x57            | 12600             | 4000                 | >80                 | 98               | 5,2        |
| Marengo R LED4x4300 B333 T840 | IP40, framed | 595x1195x57            | 17200             | 4000                 | >80                 | 142              | 5,2        |

#### Options available on request:

- |           |   |      |  |
|-----------|---|------|--|
| DIM       | - Dimmable ballast 1-10V  | W625 | - Designed specifically for the German market to fit 625x625 suspended ceiling |
| SWITCHDIM | - Switch DIM ballast  | SB   | - Support brackets (4 pieces)  |
| DALI      | - DALI ballasts   | T830 | - Color temperature 3000K  |
| EMG       | - Emergency version 1 hour  | T840 | - Color temperature 4000K  |
| EM2       | - Emergency version 2 hours   | T857 | - Color temperature 5700K  |
| EM3       | - Emergency version 3 hours   | L80  | - Opal sheet with 80% light transmission                                       |
| MPRZ      | - Mikropismatic diffuser  |      |  |
| WIE       | - 3- poles connector Wieland or similar connectors (subject to minimum order) |      |  |

**LEVANTO R LED4X1050 B199 T840**

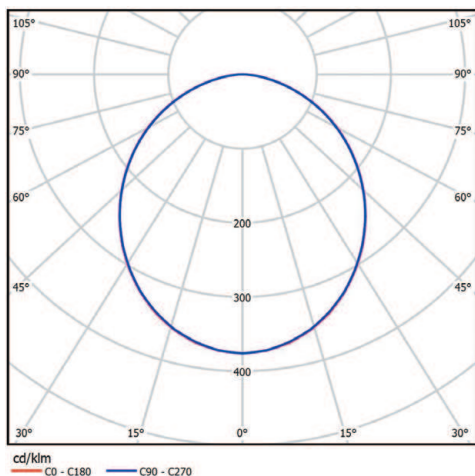

**MARENCO R LED4X1050 B202 T840**

